
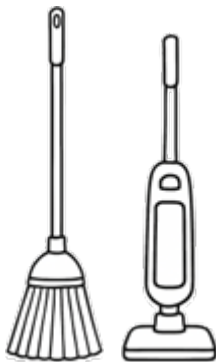


Grove Engineered Hardwood Maintenance Guide

Your Grove Engineered hardwood is finished with an ultra durable acrylic lacquer that when maintained and protected properly, will provide a timeless beautiful floor to your space for many years.

Getting Started- Non rubber-backed, hardwood safe rugs, should be used at entry ways, in front of kitchen sinks and refrigerators with ice dispensers. Felt pads should be installed under all chair legs or furniture that slide directly on the hardwood. Rolling chairs should always have a glass or plastic protection pad underneath them. Always lift and move heavy items or furniture. Never slide furniture as it can dent or scratch the hardwood. Maintain indoor relative humidity between 30% and 55% and indoor temperature between 65 and 85 degrees. South and West facing windows should have window coverings installed and used during the afternoon.

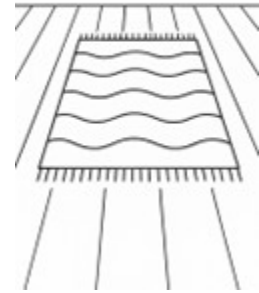

Basic Cleaning- For everyday cleaning and maintenance use a basic bristle broom or vacuum that doesn't use an abrasive beater bar. Clean up wet spills immediately so that it doesn't soak in between the planks and cause long term swelling or damage. To spot clean, use a damp microfiber cloth.

Deeper Cleaning- For the majority of spills and deep cleaning only plain clean water is required. For harder stains or spills we recommend Pallmann or Bona Hardwood floor cleaner. Any cleaner used should be Ph neutral. If a non Ph neutral cleaner is used it will leave residue that attracts dust and can be impossible to remove. Hardwood should only be cleaned with a damp microfiber replaceable head style mop as pictured. Never use a traditional wet mop. Over time excess water will damage the hardwood finish. For larger areas clean out or replace microfiber once it becomes dirty with clean water.

